

### 户外用互感器

6-35kV

户外 单相 环氧树脂浇注式

OUTDOORS SINGLE-PHASE EPOXY RESIN CASTING TYPE

#### 技术参数 Technical data

○ 产品性能符合标准：GB/T20840.1、2 和 IEC61869-1、2

The current transformers are in accordance with GB/T20840.1、2 and IEC61869-1、2 standards

○ 额定绝缘水平：40.5/95/185kV

Rated insulation level 40.5/95/185kV

○ 额定二次电流：5A 或 1A

Rated secondary current 5A or 1A

○ 额定频率：50Hz 或 60Hz


Rated frequency 50Hz or 60Hz

○ 环境温度：-25℃ ~+40℃

Ambient temperature -25℃ ~+40℃

○ 污秽等级：IV级

Pollution class: class IV

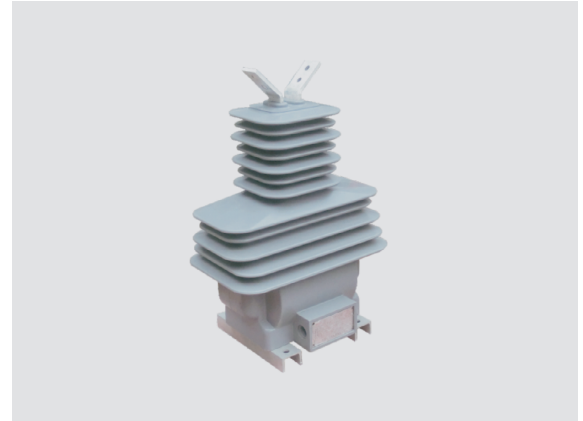

#### LZZBW1-35

额定一次电流 (A) Rated primary current	短时热电流 (kA/S) Short-time thermal current	额定动稳定电流 (kA) Rated dynamic current	准确级组合 Class combination	准确级及额定输出 (VA) COS φ =0.8 Accuracy class and rated output					表面爬电距离 (mm) Surface creepage distance	重量 (kg) Weight
				0.2(S)0.5S	0.5	5P10	5P15	5P20		
10-200	150 I <sub>1n</sub> × 10 <sup>-3</sup>	375 I <sub>1n</sub> × 10 <sup>-3</sup>	0.2 (S)/0.5(S) 0.2(S)/5P 0.5(S)/5P	10	20				1200	51
300	31.5	80				80	50	30		
400-500	45	110				100	60	40		
600-800	63	130								
1000-2000	100	160								

额定一次电流 (A) Rated primary current	短时热电流 (kA/S) Short-time thermal current	额定动稳定电流 (kA) Rated dynamic current	准确级组合 Class combination	准确级及额定输出 (VA) COS φ =0.8 Accuracy class and rated output					表面爬电距离 (mm) Surface creepage distance	重量 (kg) Weight
				0.2(S)0.5S	0.5	5P10	5P15	5P20		
10-200	150 I <sub>1n</sub> × 10 <sup>-3</sup>	375 I <sub>1n</sub> × 10 <sup>-3</sup>	0.2(S)/0.2(S)/5P 0.2(S)/0.5(S)/5P 0.2(S)/5P/5P 0.5(S)/5P/5P	10	20				1200	54
300	31.5	80				30	20	30		
400-500	45	110				30	20	15		
600-800	63	130				30	20	15		
1000	100	160				50	30	20		
1200-1600						50	30	20		
2000						60	30	25		
			60	40	25					

#### LZZBW2-35

额定一次电流 (A) Rated primary current	短时热电流 (kA/S) Short-time thermal current	额定动稳定电流 (kA) Rated dynamic current	准确级组合 Class combination	准确级及额定输出 (VA) COS φ =0.8 Accuracy class and rated output					表面爬电距离 (mm) Surface creepage distance	重量 (kg) Weight
				0.2(S)0.5S	0.5	5P10	5P15	5P20		
10-200	150 I <sub>1n</sub> × 10 <sup>-3</sup>	375 I <sub>1n</sub> × 10 <sup>-3</sup>	0.2(S)/0.2(S)/5P/5P 0.2(S)/0.5(S)/5P/5P 0.5(S)/0.5(S)/5P/5P	30	30				1200	72
300	31.5	80				50	40	30		
400-500	45	110								
600-800	63	130								
1000	100	160								
1200-1600										
2000										

注：如用户要求的参数超出上表范围，可与我公司协商后确定。

Note: If the required parameter is beyond the above range, it can be discussed and confirmed with us.